


# POWER TRANSFORMERS

## For TinySwitch™ TNY253, TNY254 and TNY255





- Designed for use with Power Integration TNY253, TNY254 and TNY255 in low cost AC to DC converters for a large range of applications
- 4000 Vrms isolation
- Materials meet UL 94V-0 and IEC 950
- No audible noise
- Only two parts to cover a large range of output voltage

### Electrical Specifications @ 25°C — Operating Temperature -30°C to +110°C

Part Number	Turns Ratio	Leakage Inductance (μH)	Matched To	Power	Applications
P5000	1:0.07:0.07	180 MAX	TNY253	Up to 2 W	AC: 85 to 265 Vac, 2 DC outputs from 3.3 Vdc up to 6 Vdc or 1 DC output from 6 Vdc up to 12 Vdc
P5001	1:0.1:0.1	180 MAX			AC: 85 to 265 Vac, 2 DC outputs from 6 Vdc up to 12 Vdc or 1 DC output from 12 Vdc up to 24 Vdc
P5004	1:0.07:0.07	200 MAX	TNY254	Up to 4 W	AC: 85 to 265 Vac, 2 DC outputs from 3.3 Vdc up to 5.5 Vdc or 1 DC output from 6 Vdc up to 12 Vdc
P5005	1:0.1:0.1	200 MAX			AC: 85 to 265 Vac, 2 DC outputs from 6 Vdc up to 10 Vdc or 1 DC output from 12 Vdc up to 24 Vdc
P5008	1:0.07:0.07	100 MAX	TNY255	Up to 5.5 W	AC: 85 to 265 Vac, 2 DC outputs from 3.3 Vdc up to 6 Vdc or 1 DC output from 6 Vdc up to 18 Vdc
P5009	1:0.1:0.1	100 MAX			AC: 85 to 265 Vac, 2 DC outputs from 6 Vdc up to 12 Vdc or 1 DC output from 12 Vdc up to 24 Vdc

### Mechanical

### Schematic

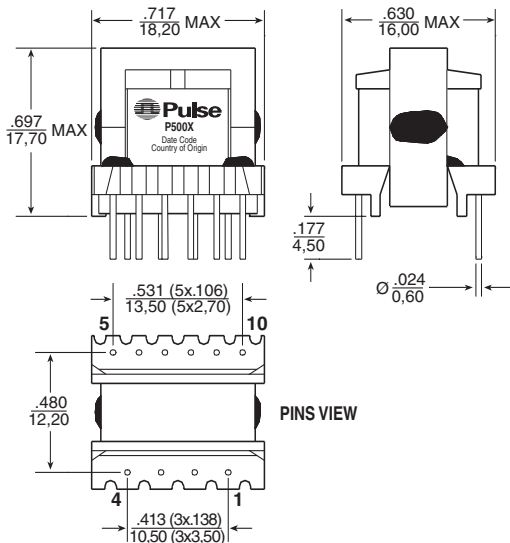

Weight . . . . . 6.7 grams  
 Tray . . . . . 40/tray  
 Dimensions:  $\frac{\text{Inches}}{\text{mm}}$