


Тюнер UVD6201-RB (TDQ-4A) 9V

Features

- VHF&UHF combinations
- VHF&UHF combinations plus CATV (300MHz) ch available

Standard Specifications (Typical models)

| | | |
|--------------------|------------|---------------|
| TYPE | TDQ-4A | |
| SYSTEM | Normal D/K | |
| BAND(MGZ) | L | 49.75-85.25 |
| | H | 168.25-216.25 |
| | U | 471.25-863.25 |
| I.F.(MGZ) | fp | 38.0 |
| | fp | 31.5 |
| SUPPLY VOLTAGE (v) | 9 | |
| I/O ImPEDANCE (om) | 75 | |
| POWER GAIN (DB) | VHF:28min | |
| | UHF:28min | |
| NOISE FIGURE (DB) | VHF:10max | |
| | UHF:14max | |
| V.S.W.R | VHF:10max | |
| | UHF:8max | |
| I.F.REJ. (DB) | VL:30min | |
| | VH:45min | |
| | UHF:50min | |
| IMAGE REJ. (DB) | VL:40min | |
| | VH:30min | |
| | UHF:18min | |

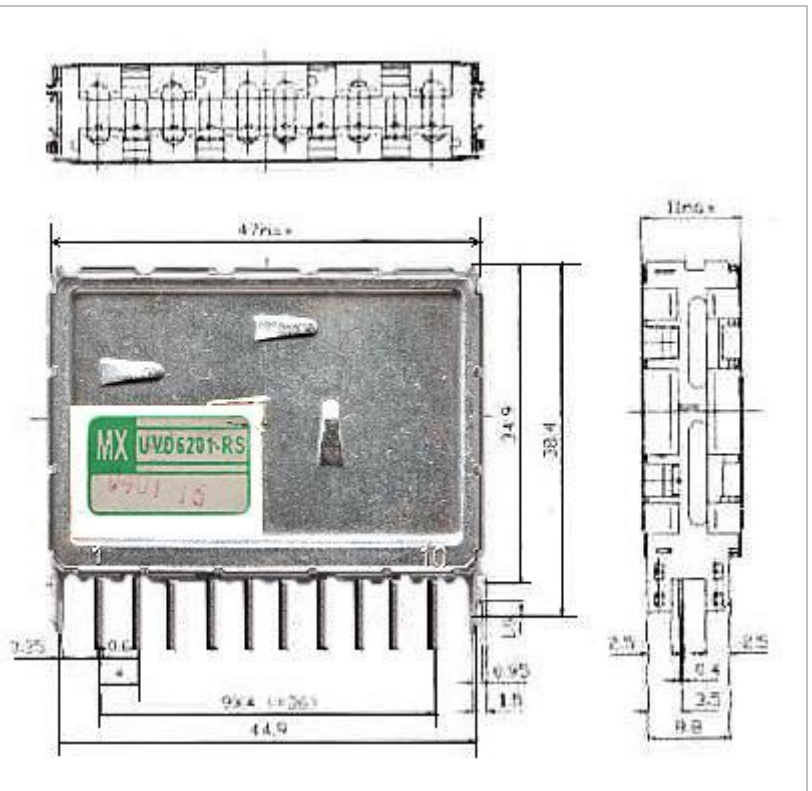

Outline Dimensions

| TERMINALS | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|-------------|---------|-----|-----------|----------------|-------|-------|----|-------|----|----|
| TDC-4AB-300 | ANT | AGC | BU | VT | BH | BL | NC | BM | IF | NC |
| | Антенна | APY | ДМБ (UHF) | Tuning voltage | VHF-H | VHF-L | | VHF-M | ПЧ | |

